

# Bucket Elevator



GEV

**Genç Degirmen**  
MILLING MACHINERY


*Excellent Milling Properties...*

## WORKING PRINCIPLES

Bucket Elevator is used to vertical transporting without damage. Transporting operation has be done by plastic or metal buckets which integrated on purposeful rubber band.

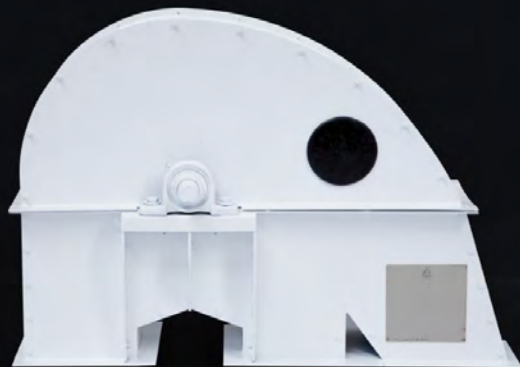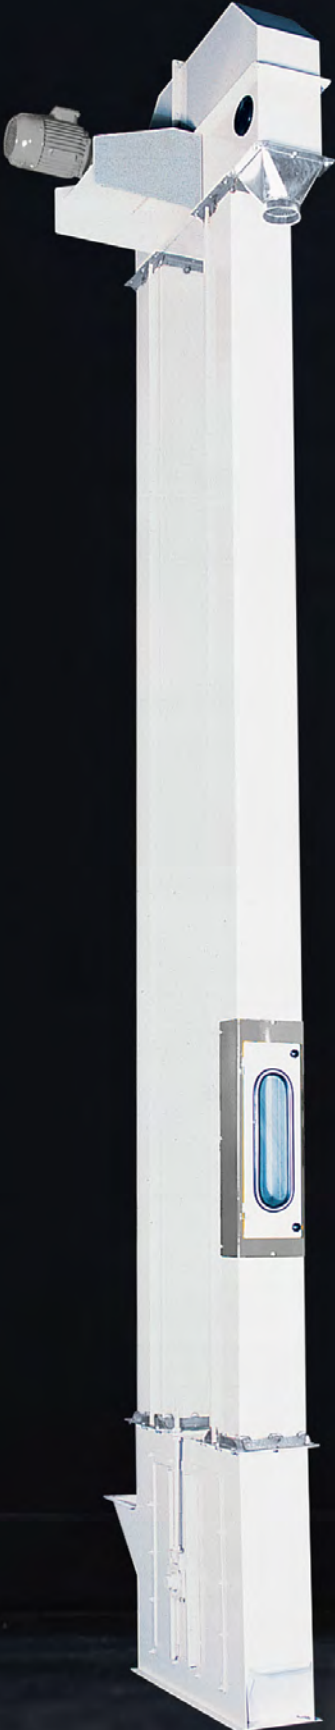

## Product Data Sheet

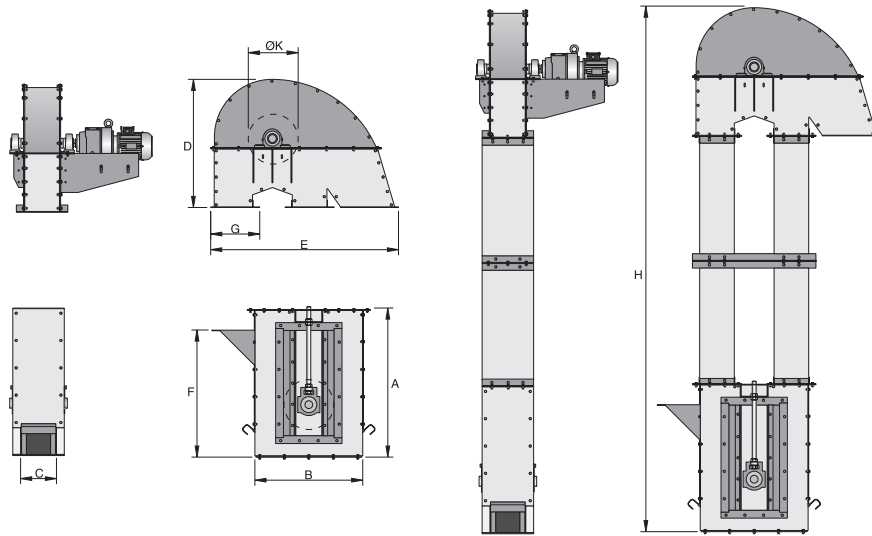

Type	Technical Features							Dimensions (mm)							
	Max Length (m)	Bucket	Belt (mm)	Power (kW)	Capacity (t/h)			A	B	C	D	E	F	G	ØK
					Wheat	Flour	Bran								
GEV 250/150	30	100-120	140	0.75-3	7.5	5.5	3	756	700	178	657	963	653	2115	250
GEV 320/190	30	140-160	180	1.5-5	20	16	8	816	700	223	780	1137	713	268	320
GEV 400/240	30	180-200	220	1.5-7.5	32	27	14	1007	805	275	968	1358	903	3025	400
GEV 500/360	30	280-300	320	7.5-15	80	65	34	1238	1049	424	1343	1728	1135	3815	500
GEV 630/440	30	320	340	11-22	105	86	45	1470	1285	540	1817	1910	1354	4640	630